

GRIPPS®

ENGINEERED FOR DROP PREVENTION

Technical Specification Sheet

GRIPPS® Gap Guard

SKU: H06035



SKU: H06035
Title: Gap Guard
Max Load (D-ring): 2.5kg | 5.5lb
Weight: 3kg | 6.61lb
Length: 2.5m | 98in
Width: 1m | 39in
Fire Rating: AS1530.3

FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

www.gripps.com

SAFETY INFORMATION

⚠ WARNING Before using the GRIPPS® Gap Guard, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

Intended Use:

When used properly, the GRIPPS® Gap Guard can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

⚠ WARNING Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between any connected tethers and rough or sharp edges.
- Regularly inspect your tool in use & connected tethers to ensure they are free from any dust, grime or debris.
- All connected tools and equipment, including connection

- points, must be compatible for use with this DTP device.
- Always wear appropriate personal protective equipment.
 - If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
 - All procedures shown in this instruction are for GRIPPS® Gap Guard.


GENERAL USE AND CARE

The GRIPPS® Gap Guard is an exceptionally flexible, durable, and reusable modular solution for preventing drops around handrails and grid mesh flooring, safeguarding work areas from drops.


Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration.



HOW TO USE/INSTRUCTIONS

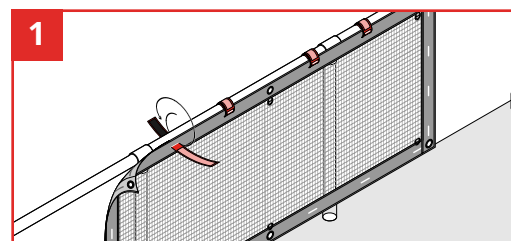


Position Gap Guard against handrail or flooring. Secure Velcro straps to handrail or grid mesh around the perimeter of Gap Guard evenly.

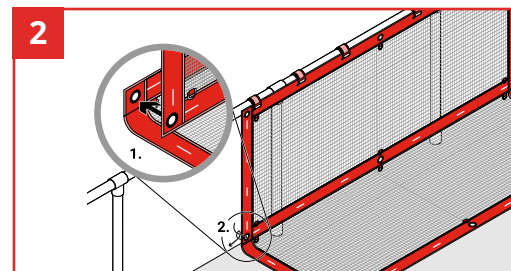

To combine multiple Gap Guard together, overlap Velcro edging of each Gap Guard. Ensure no kinks or gaps exist. Once overlapped, add further security by securing ties through the perimeter eyelets.

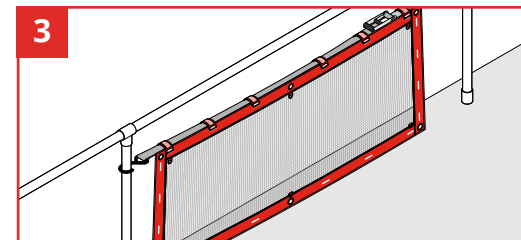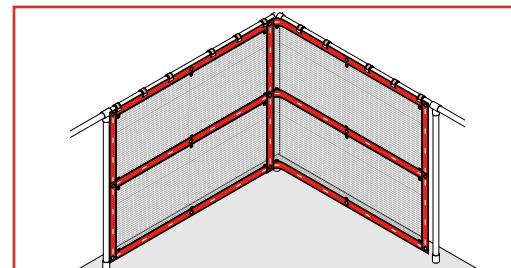

To secure Gap Guard on ratchet straps, attach in the same manner as step one.

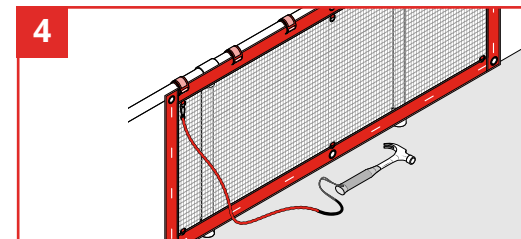

Attach GRIPPS® tool tethers to D-ring anchor points as necessary. Never exceed maximum load. Always be cautious of maximum tether length.

After Use Care:

Clean and inspect the Gap Guard and any connected tethers. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

GRIPPS®



linkedin.com/company/grippsglobal



facebook.com/grippsglobal



youtube.com/@gripps3480grippsglobal



instagram.com/grippsglobal