

# GRIPPS®

## GRIPPS Technical Specification Sheet:

### GRIPPS® Tool Catch

Models: H01005, H01006, H01007, H01417



**H01005 / H01005-5 / H01005-10**  
Tool Catch  
(12mm x 55mm | 0.47" x 2.1")  
**Max Load:** 1.0kg | 2.0lbs  
**Max Tether Length:** 1.3m | 51"  
**ANSI/ISEA 121-2018 COMPLIANT**

**H01006 / H01006-5 / H01006-10**  
Tool Catch  
(25mm x 90mm | 0.98" x 3.5")  
**Max Load:** 2.5kg | 5.0lbs  
**Max Tether Length:** 1.3m | 51"  
**ANSI/ISEA 121-2018 COMPLIANT**



**H01007 / H01007-10**  
Tool Catch (Non-Conductive)  
**Max Load:** 1.0kg | 2.0lbs  
**Max Tether Length:** 1.3m | 51"  
**ANSI/ISEA 121-2018 COMPLIANT**

**H01417**  
V-Gripp Tape & Tool Catch Kit

## GRIPPS® Tool Catch

### SAFETY INFORMATION

**⚠️ WARNING** Before using GRIPPS® Tool Catch, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

#### Intended Use:

When used properly, the GRIPPS® Tool Catch can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

**⚠️ WARNING** Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between any connected tethers and rough or sharp edges.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.
- Always wear appropriate personal protective equipment.

- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Tool Catch & V-Gripp Tape products only.

### GENERAL USE AND CARE

GRIPPS® Tool Catches & V-Gripp Tape create an instant load-rated Tool Connector Point to many tools. The V-Gripp tape is self vulcanizing so does not rely on adhesives to stick. For further protection against wear and tear, use Gripp Shrink.


#### Recommended Use of GRIPPS® V-Gripp Tape:

1. Use the Tool Catch (H01005 = 12mm-55mm / 0.47" x 2.1") for tools that weigh up to 1.0kg/2.2lbs.
2. Use the Tool Catch (H01006 = 25mm x 90mm / 0.98" x 3.5") for tools that weigh up to 2.5kg/5.0lbs.
3. Use the Tool Catch (Non-Conductive) for tools that weigh up to 1.0kg/2.2lbs where electrical hazards exist.
4. Use Tool Catches on tools that do not have an existing Tool Connector point.
5. Do not use a Tool Catch if the placement of the Tool Catch makes the tool unsafe to use.
6. If working in electrical environments, use the H01007 model non-conductive Tool Catch.
7. Never install a Tool Catch on the tapered portion of a tool.
8. Never use Gripp Shrink as a replacement for V-Gripp Tape. Only use Gripp Shrink where V-Gripp Tape has already been applied.
9. Only use V-Gripp Tape with GRIPPS® Tool Catches & Tool Hitch's.


#### Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration.


### HOW TO USE / INSTRUCTIONS:

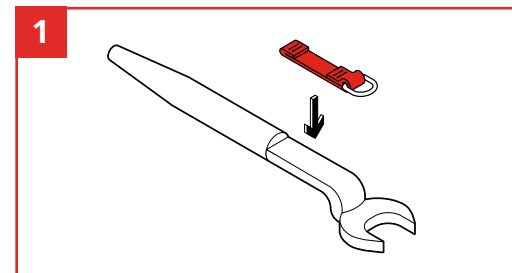

Place Tool Catch with metal ring facing away from the tools center of gravity, white tag facing up.

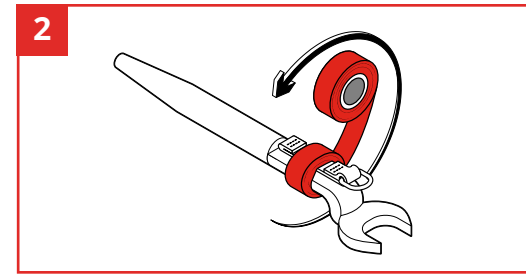

Wrap the tape around the tool 10x while stretching the tape to activate the self-vulcanizing feature, creating a secure connection. Ensure raised 'catch' is not covered by the tape. Pull on Tool Catch with force to test application.

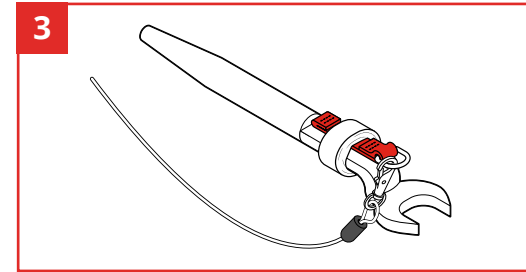

Your Tool Catch is now ready to be connected with a suitable GRIPPS® tether via the D-Ring.

#### After Use Care:

Clean and inspect applied Tool Catch, V-Gripp Tape and any connected tethers after use. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

### FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

WWW.GRIPPS.COM

# GRIPPS®

linkedin.com/company/grippsglobal

facebook.com/grippsglobal

youtube.com/@gripps3480grippsglobal

instagram.com/grippsglobal